
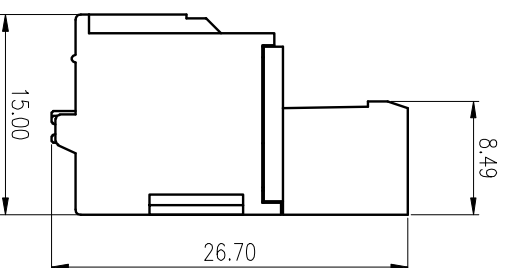
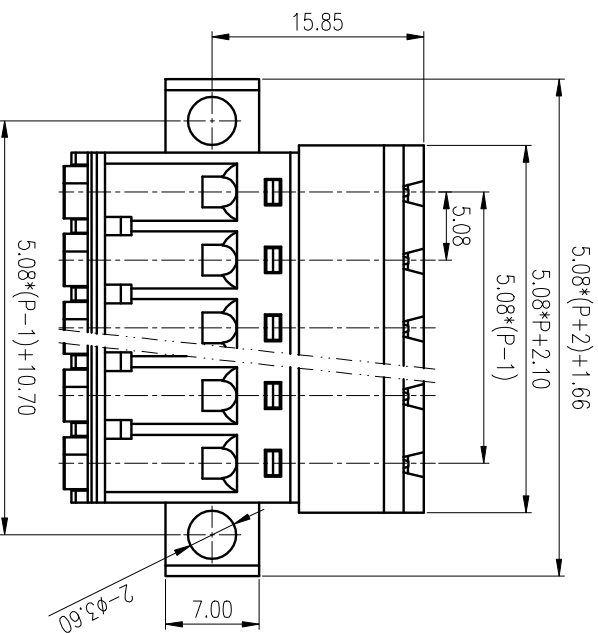


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
①	初版发行		

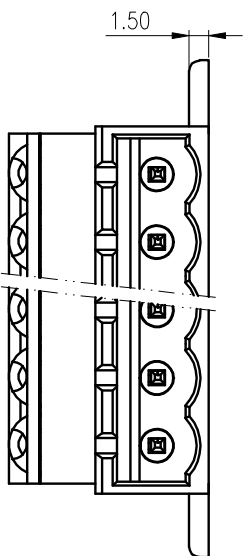

- NOTES1:**  
**UL Standard:**  
 1.Voltage Rating: 300V, Current Rating: 10A  
 2.Suitable Electric Wire: 26-12AWG  
**IEC Standard:**  
 1.Voltage Rating: 400V, Current Rating: 15A  
 2.Suitable Electric Wire: 24-12AWG

- NOTES2:**  
 1.Pitch : 5.08mm  
 2.Withstand Voltage : AC2500V for 1 minute  
 3. Insulation Resistance : 500MΩ / DC500V  
 4. Using Temperature Range : - 40℃ ~ + 105℃

**技术要求1:**

- UL 标准:**  
 1. 额定电压: 300V, 额定电流: 10A  
 2. 适用线规: 26~12AWG  
**IEC 标准:**  
 1. 额定电压: 400V, 额定电流: 15A  
 2. 适用线规: 24~12AWG

**技术要求2:**

1. 间距: 5.08mm  
 2. 耐电压值: AC2500V/min  
 3. 绝缘阻抗: 500MΩ/DC500V  
 4. 使用条件: -40℃~+105℃

	pitch dimension		Nominal dimension						Tolerance
	over	over	over	over	over	over	over	over	
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	150	—
	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	LC60-5.08五金件	2083B0001AY	P	磷青铜	镀锡
4	LC6-5.08-弹片	P2A0DL6588BY	P	不锈钢	
3	LC6-5.08-接钮	1020D0Y01AY	P	PA66-Y0	
2	LC60-5.08-盖板	2083C0YXXAY	1	PA66-Y0	
1	LC60N-5.08-本体	2084A0YXXAY	1	PA66-Y0	


**上海有乐电气有限公司**  
 Shanghai Youle Electric Co., Ltd  
 DWG NO. SP-2-208401 REV: 10  
 TTTTB  
 LC60N-5.08-XP-1Y-00A  
 LC60N-5.08-成品