


REVISION RECORD			
REV.	CONTENT	MOD.	DATE
△	初版发行		


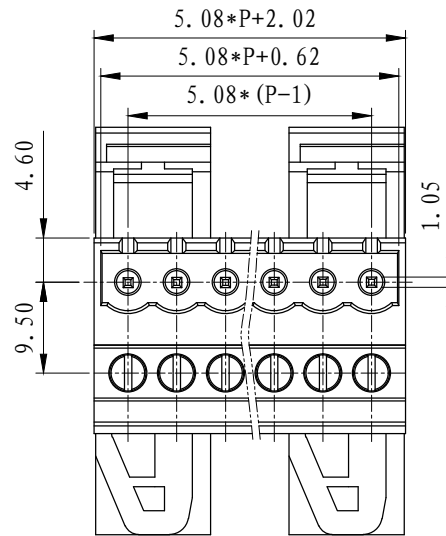


NOTES:

Pitch: 5.08mm Pole: 2-24P  
 Rated Voltage: 300V  
 Rated Current: 15A  
 Withstand Voltage: AC2500V for 1 minute  
 Using Temperature Range : -40°C--+105°C  
 Wire range : 24-12 AWG  
 Screw Torque Value : 0.5Nm


技术要求:

间距: 5.08mm 极数: 2-24P  
 额定电压: 300V  
 额定电流: 15A  
 耐电压值: AC 2500V/min  
 使用条件: -40°C--+105°C  
 适用线规: 24-12AWG  
 螺丝扭矩: 0.5 Nm

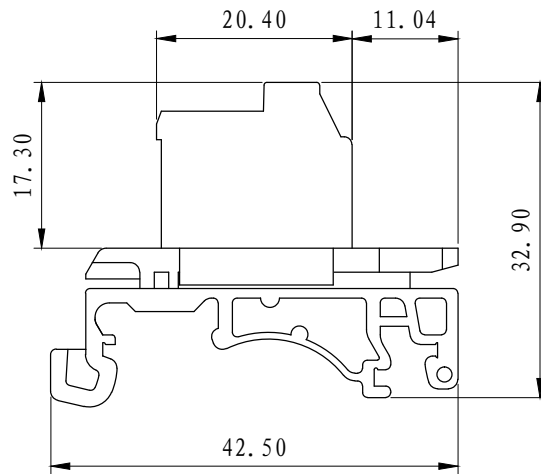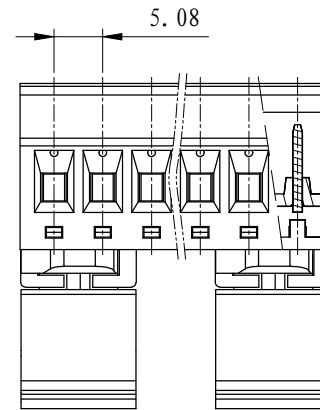

6	LC18-5.08方针	1047B0001AV	P	紫铜	镀雾锡
5	LC1-5.08-方块	F1A0B1C5083V	P	黄铜	镀镍
4	LC1-5.08-螺丝	SPOYA305301V	P	碳钢	三价铬钝化彩锌
3	LC16脚	1045TOY01AV	1-2	PA66-V0	
2	LC19U-5.08-盖板	1050C0YXXAV	1	PA66-V0	
1	LC19U-5.08-主体	1050A0YXXAV	1	PA66-V0	

NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	2024/12/17	UNITS	mm
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1

 上海有乐电气有限公司  
 Shanghai YouLe Electric CO.,LTD

TITLE

LC19U-5.08-1Y-XXP-00A  
 LC19U-5.08成品

	pitch dimension			Nominal dimension					— ◇ ○
	over 0 to 6	over 6 to 10	over 10 to 24	over 0 to 30	over 30 to 60	over 60 to 100	over 100 to 150		
variable range	0 to 6	6 to 10	10 to 24	0 to 30	30 to 60	60 to 100	100 to 150	0.05/10	
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7 ±1.0	0.05/10	