



REVISION RECORD

REV.	CONTENT	MOD.	DATE
△	初版发行		





2P

3P



4P

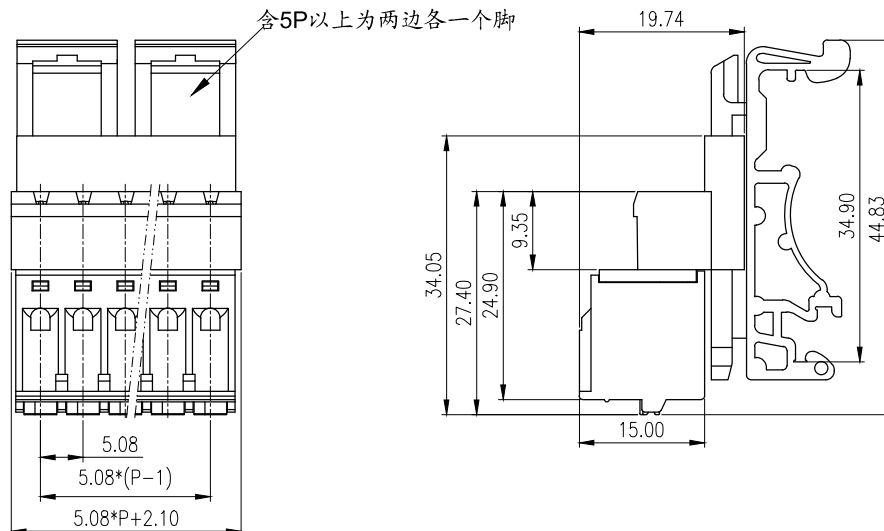

NOTES1:

UL Standard:

1.Voltage Rating: 300V, Current Rating: 10A

NOTES2:

1.Pitch: 5.08mm

2.Withstand Voltage: AC2500V for 1 minute

3.Using Temperature Range: -40℃ ~ +105℃

4.Suitable Electric Wire: 26-12AWG

技术要求1:

UL 标准:

1.额定电压: 300V, 额定电流: 10A

技术要求2:

1.间距: 5.08mm

2.耐电压值: AC2500V/min

3.使用条件: -40℃~+105℃

4.适用线规: 26-12AWG

6	LC16-脚	1045T0Y01AV	1-2	PA66	
5	LC60-5.08五金件	2083B0001AV	P	磷青铜	镀锡
4	LC6-5.08-弹片	F2A0DLC658BV	P	不锈钢	
3	LC6-5.08-按钮	1020D0Y01AV	P	POM	
2	LC26U-5.08-盖板	2085A0YXXAV	1	PA66-V0	
1	LC6-5.08-本体	1020A0YXXAV	1	PA66-V0	
NO.	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DES.	CMZ	DATE	2025/03/26	UNITS	MM
CHK.		DATE		SIZE	A4
APP.		DATE		SCALE	1:1
				DWG NO.	SP-2-208501
				REV:	V0
				TITLE	LC26U-5.08-成品



上海有乐电气有限公司
Shanghai YouLe Electric Co., LTD

	pitch dimension			Nominal dimension					— /
	over 0	over 6	over 10	over 0	over 30	over 60	over 100	over 150	
variable range	to 6	to 10	to 24	to 30	to 60	to 100	to 150		
Tolerance	±0.1	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	